


Structural Drill Line



FRANKLIN


Infinite Solutions. Ultimate Performance.

FXP 44x18 TC15

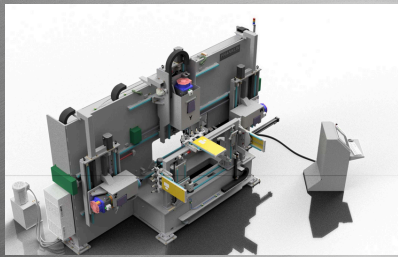


FRANKLIN FXP 44X18 TC15

- 18 x 44 max and 4 x 4 min part window
- Hydraulic clamping
- Servo driven
- 30,000 lbs machine weight

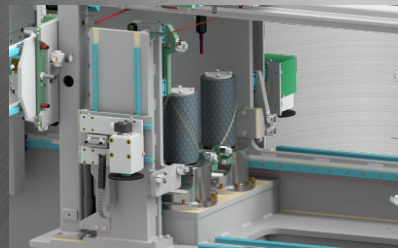

DUAL AXIS PINCH ROLL DRIVE

- Hydraulic clamping
- Precision measuring wheel
- AC Servo driven pinch roll
- Infeed and outfeed measuring

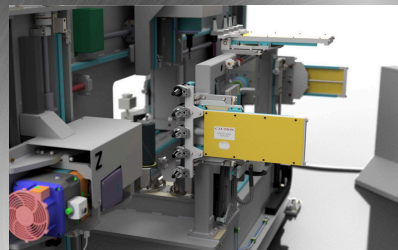

AUTOMATIC TOOL CHANGER

- 5 tools per spindle 15 total
- Tool length verification
- Three (3) tool magazines mounted on pneumatic slides.
- Automatic tool length calibration
- Thru spindle coolant (MQL)



FRANKLIN CNC CONTROLS

Franklin machine controls feature a PC based control system with a Windows®-based operator interface, providing a familiar environment with easy file management.

DRILL UNITS

Rapid Advance Ball Screw Servo	720 IPM
Spindle Motor with Encoder Feedback	26 HP
Spindle tool holder	CAT-40
Max RPM	4500
Drill Capacity Max.	1-9/16"

SCAN
ME

